

ELECTRIC PUMP


Hydraulic PE17 Series

Up to 55 Ton


17 cu. in./min. 2 Speed

FOR MAINTENANCE AND CONSTRUCTION APPLICATIONS.

- For use with single or double-acting cylinders at operating pressures up to 10,000 psi.
- For intermittent duty; starts under full load.
- Equipped with ½ hp, 3,450 rpm, single-phase, thermal protected induction motor; 10 ft. remote control cord (PE172S has 25 ft. cord)
- Low amperage draw; small generators and low amperage circuits can be used as power source.
- Extremely quiet noise level (67-81 dBA).



10,000 psi

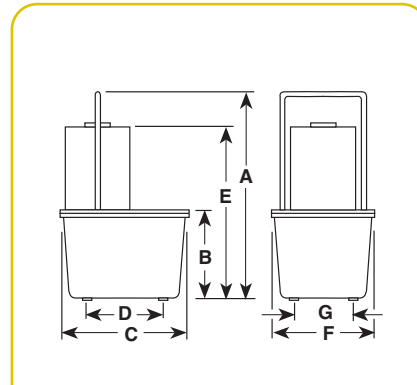

Pump No.	Max. dBA at Amp Draw		Idle and 10,000 (psi)	115 V - at 10,000 (psi)	Oil Del. (cu. in./min. @) †				A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	Prod. Wt. with Oil (lbs.)
	Pressure Output (psi)	rpm			0 (psi)	100 (psi)	5,000 (psi)	10,000 (psi)								
PE17 Series	10,000	3,450	67/81**	10	290	190	20	16	18½	7	11¾	7⅞	14⅞	9¼	5⅞	45
PE17M Series	10,000	3,450	67/81**	10	290	190	20	16	18½	6⅞	11½	—	14½	9½	—	53
PE84* Series	10,000	1,750	67/81**	10	145	120	12	8	18½	7	11⅞	7⅞	15¾	9¼	5⅞	47

* PE84 is the same as the PE174, except has continuous duty with 2 gallon thermoplastic reservoir and features 1,750 RPM

** Measured at 3 ft. distance, all sides.

† Typical delivery. Actual flow will vary with field conditions.



For use with Cyl. Type	Description	Order No.	Valve Type	Valve No.	Valve Function	Reservoir Control Switch ††	Motor	Usable (cu. in)
Single-Acting	Base model pump with 1/2 hp pump with 2 gal. thermoplastic reservoir.	PE172	2-Way	9517	Advance Return (Auto†)	Remote Motor Control (10ft.) on/off	1/2 hp, 110/115V* 50/60 Hz, Single Phase	295
Single-Acting	PE172, except has 2 1/2 gal. aluminum reservoir.	PE172M	2-Way	9517	Advance Return (Auto†)	Remote Motor Control (10ft.) on/off	1/2 hp, 110/115V* 50/60 Hz, Single Phase	375
Single-Acting	PE172, has solenoid operated valve.	PE172S	3-Way	9579	Advance Hold Return	Remote Motor & Valve (25 ft.)	1/2 hp, 110/115 VAC 50/60 Hz, Single Phase	295
Single-Acting	PE172S, except has aluminum reservoir.	PE172SM	3-Way	9579	Advance Hold Return	Remote Motor & Valve (25 ft.)	1/2 hp, 110/115 VAC 50/60 Hz, Single Phase	375
Single-Acting	Best suited for crimping, punching, pressing. Not for lifting. Thermoplastic reservoir.	PE172A [∞]	Auto./Dump Manifold	45554	Advance Return	Remote Motor Control (10ft.) on/off	1/2 hp, 110/115V* 50/60 Hz, Single Phase	295
Single-Acting	PE172A, except has aluminum reservoir.	PE172AM [∞]	Auto./Dump Manifold	45554	Advance Return	Remote Motor Control (10ft.) on/off	1/2 hp, 110/115V* 50/60 Hz, Single Phase	375
Single/ Double-Acting	PE172, except has 9500 double-acting valve.	PE174	4-Way	9500	Advance Hold Return**	Remote Motor Control (10ft.) on/off	1/2 hp, 110/115V* 50/60 Hz, Single Phase	295
Single/ Double-Acting	Same as PE174, except has aluminum reservoir.	PE174M	4-Way	9500	Advance Hold Return**	Remote Motor Control (10ft.) on/off	1/2 hp, 110/115V* 50/60 Hz, Single Phase	375

* Available with 220V 50Hz motor (to order, place suffix "50-220" behind pump order number).

** "Advance" position holds pressure with motor shut off.

† "Advance" position holds pressure with motor shut off. "Return" position advances cylinder with motor running and returns cylinder with motor shut off.

†† Control switch on PE17 series wired with line voltage.

∞ Not to be used for lifting.

NOTE: The remote motor control switch on 220V 50Hz cycle PE17 series pumps is 24 volt.

NOTE: Usable oil is calculated with the oil fill at the recommended level of 1 1/2" below reservoir cover plate.

‡ **Some Power Team pumps are available in special configurations not listed in this catalog. For your special requirements please consult your local distributor or the Power Team factory.**

Contact Factory for special 12V DC version for service vehicles

POWERTEAM.COM