



## 6000 CT Serisi Torklu Tornavidalar

### Torque Screwdrivers



- » 0.1 - 6.0 N.m aralığında farklı modeller.
- » ISO6789 standartlarında uygun  $\pm\%6$  hassasiyet.
- » N.m ölçekli okunaklı tork ayar paneli.
- » 1/4" dişi altıgen bits tutucu uç standart.
- » Sıkma ve sökme yönünde torklama işlemi yapar.
- » Tork ayarı uç kısmından yapılır, kolayca ayarlanıp kitlenir.
- » Seçilen tork değerine ulaşıncaya boşu çıkar.
- » Dayanıklı kabzası ele tam oturur ve işlem sırasında kaymaz.

- » Different models range from 0.1 to 6.0 N.m .
- » Easy-to-read N.m scale.
- »  $\pm\%5$  Accuracy exceeds the requirements of ISO6789.
- » Simple setting of the required torque by hand.
- » Tool 'slips' when torque is achieved removing the possibility of 'over-tightening'.
- » Supplied with standard 1/4" hexagon bits holder.
- » The durable handle is fully seated and does not slip during operation.

### Profesyonel Seri Tork Tornavidaları

1/4" Altıgen Bits Tutucu  
Hex Bits Holder


Parça Part	Tork Aralığı Torque Range		Ölçek Scale	Uzunluk Length	Ağırlık Weight
No.	N.m	cN.m	N.m	mm	kg
6002-CT	0.1 - 1.2	10 - 120	0.01	170	0.2
6003-CT	1.0 - 6.0	100 - 600	0.1	230	0.43



### Ekonomik Seri Tork Tornavidaları

1/4" Altıgen Bits Tutucu  
Hex Bits Holder

Parça Part	Tork Aralığı Torque Range	Ölçek Scale	Tolerans Accuracy	Uzunluk Length	Ağırlık Weight
No.	N.m	N.m	%	mm	kg
6001-1.4/3	0.4 - 1.4	0.1	$\pm 10$	119	0.2
6001-1.5/3	0.6 - 1.5	0.1	$\pm 10$	119	0.15
6001-3.0/3	1.5 - 3.0	0.1	$\pm 6$	119	0.17
6001-5.4/3	3.0 - 5.4	0.1	$\pm 6$	119	0.2

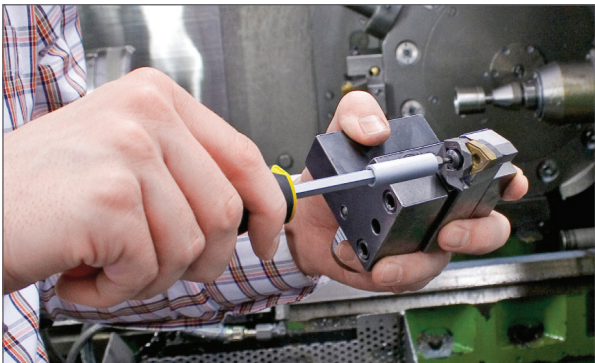

Ekonomik seri tork tornavidalarının ayar 2100-06 kodlu alyan anahtar ile yapılır. Bu alyan anahtar sevk içeriğinde vardır.

The setting of the economical series torque screwdrivers is done with the allen key code 2100-06.

Allen key is included delivery content.